


No.	DATE	MODIFICATION	REASON	MOD. BY
1	23/09/21	References and dimensions are updated	---	E.V.
2	29/05/23	Weights are added	---	E.V.

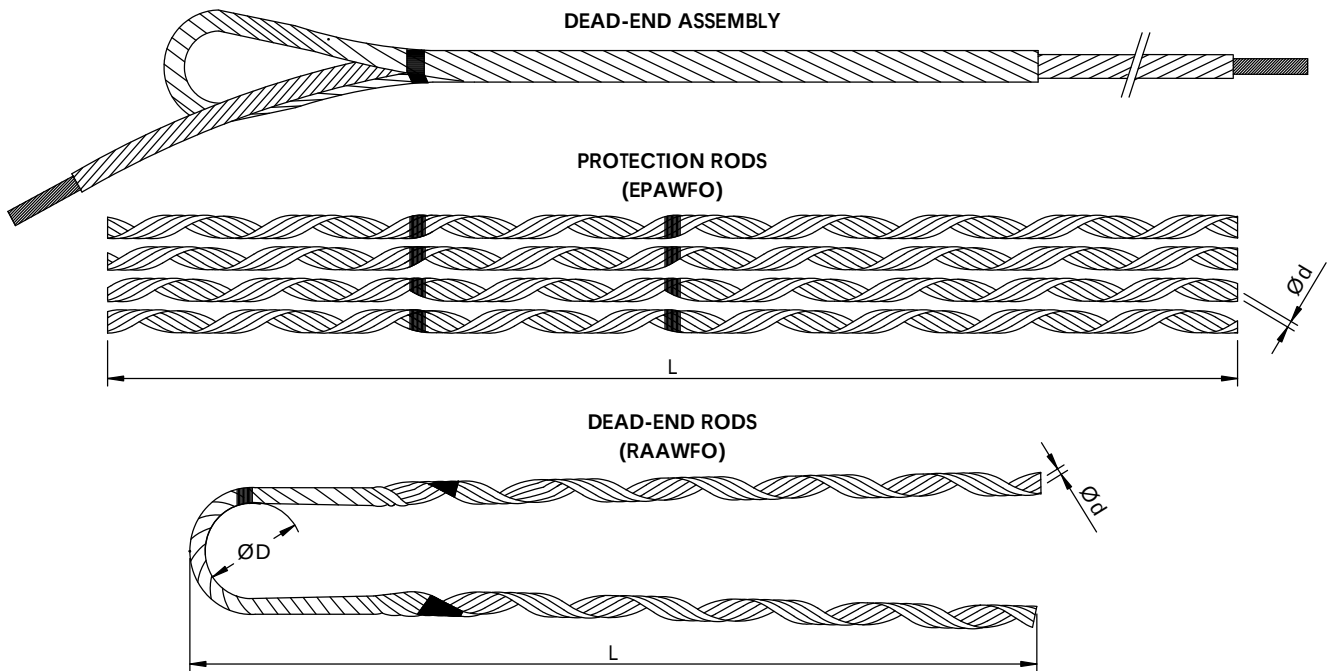

REFERENCE	Ø CONDUCTOR (mm)		Dimensions (mm.)			Rods N°	Identification colour	Breaking Load (daN)	Weight (kg)
	Min.	Max.	Ø D (Bond)	Ø d (Wire)	Lenght "L"				
RAAWFO 13/D EPAWFO 8/I/2000	7,60	8,50	63	3,66 2,89	1000 2000	6 4-3-3	YELLOW GREEN	6.000	0,900 0,940
RAAWFO 14/D EPAWFO 9/I/2000	8,51	9,50	63	3,66 2,59	1120 2000	6 3-4-4	RED ORANGE	6.000	1,010 0,835
RAAWFO 15/D EPAWFO 10/I/2200	9,51	10,25	63	4,12 2,59	1150 2200	6 4-4-5	BLUE GREEN	6.500	1,310 1,085
RAAWFO 16/D EPAWFO 10,5/I/2200	10,26	10,75	63	4,12 2,59	1150 2200	6 4-4-5	GREEN GREEN	7.000	1,310 1,080
RAAWFO 17/D EPAWFO 11/I/2200	10,76	11,75	63	4,12 2,91	1200 2200	6 4-4-4	BLACK BLUE	7.500	1,370 1,260
RAAWFO 19/D EPAWFO 12/I/2600	11,76	12,25	63	4,12 3,26	1380 2600	6 4-4-4	YELLOW BLUE	9.000	1,575 1,870
RAAWFO 19/D EPAWFO 12,5/I/2600	12,26	12,75	63	4,12 3,26	1380 2600	6 4-4-4	YELLOW BLUE	9.000	1,575 1,870
RAAWFO 20/D EPAWFO 13/I/2600	12,76	13,65	63	4,12 3,26	1380 2600	6 4-3-3-3	BLACK YELLOW	9.500	1,575 2,025
RAAWFO 21/D EPAWFO 14/I/2600	13,66	14,50	63	4,12 3,26	1380 2600	7 4-4-3-3	RED RED	12.000	1,835 2,185
RAAWFO 21,5/D EPAWFO 15/I/2600	14,51	15,50	63	4,12 3,26	1380 2600	7 4-4-3-3	GREEN BLUE	12.000	1,835 2,185
RAAWFO 22,5/D EPAWFO 16/I/2600	15,51	16,50	63	4,12 3,26	1380 2600	7 4-4-4-3	BLUE GREEN	12.000	1,835 2,340
RAAWFO 23,5/D EPAWFO 17/I/2600	16,51	17,50	63	4,12 3,26	1380 2600	7 4-4-4-4	YELLOW BLACK	12.000	1,835 2,495
RAAWFO 24,5/D EPAWFO 18/I/2600	17,51	18,60	63	4,62 3,26	1380 2600	7 5-4-4-4	RED RED	12.000	2,310 2,650
RAAWFO 25,5/D EPAWFO 19/I/2600	18,61	19,50	63	4,62 3,26	1380 2600	8 5-5-4-4	BLACK YELLOW	12.000	2,640 2,805
RAAWFO 26,5/D EPAWFO 20/I/2600	19,51	20,60	63	4,62 3,26	1380 2600	8 5-5-4-4	BLUE BLACK	12.000	2,640 2,805
RAAWFO 27,5/D EPAWFO 21,5/I/2600	20,61	22,00	63	4,62 3,26	1380 2600	8 5-5-5-5	GREEN GREEN	12.000	2,640 3,120
RAAWFO 28,5/D EPAWFO 22/I/2600	22,01	23,00	63	4,62 3,26	1380 2600	8 5-5-5-5	GREEN BLUE	12.000	2,640 3,120

Application: OPGW conductors

Material: Clase 20SA Type A Aluminum clad steel according to standards UNE EN-61232


NOTE: Conductor wiring direction: Right

Preformed dead-end for other conductor diameters upon request.



INDUSTRIAS
ARRUTI S.A.

UNITS (mm.)



- Manufactured according to IEC 61284 standard
- Tolerances unless otherwise stated to be:
Length: +20/-10mm
Rod diameter: ±1%

- M.B.S.L.: -
- M.D.S.L.: -
- lcc: -

TOTAL WEIGHT: - Kg.

DRAWN BY	E.V.	13/09/2021	PREFORMED DEAD-END FOR OPGW CABLE RAAWFO-EPAWFO	SCALE	DRAWING	ISSUE
SIGNED BY	I.L.	13/09/2021		N/S	RAAWFO-M	1

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.