




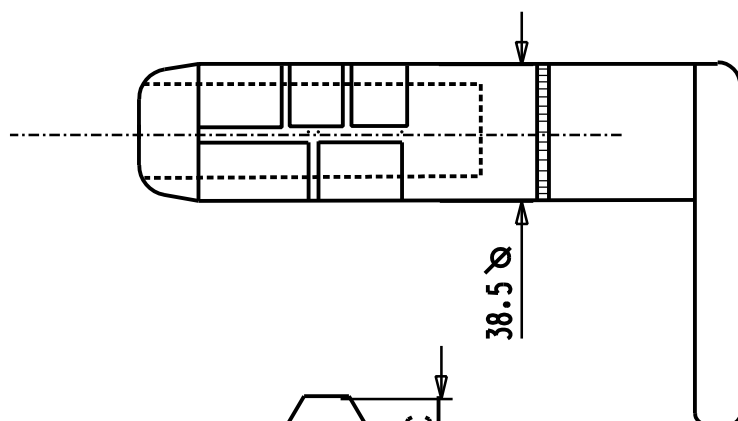

DETALLE PALA

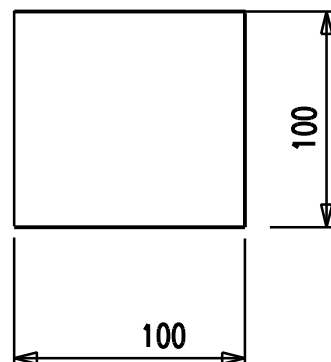

DISTANCE BETWEEN FACES AFTER COMPRESSION:
ALUMINIUM: 33MM

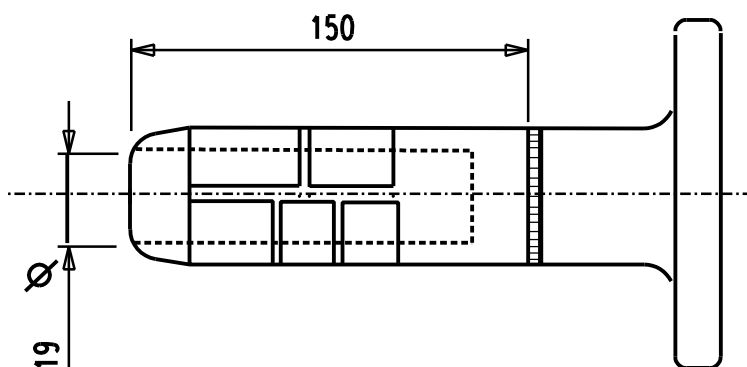

			STAINLESS STEEL AISI-304 (A2-70)	UNE-36016	P.APRIETE/TORQUE: 3KG.M
			ALUMINIO/ALUMINIUM AL-7SI 0.6MG	UNE-38242	
CAN	DENOMINATION		MATERIAL	NORMA	CARACTERISTICAS
QTY	DENOMINATION			STANDARD	CHARACTERISTIC
 ARRUT I SUBESTACIONES		CONECTOR ACODADO. ALEACION AL. CABLE A PALETA			FECHA/DATE: 13-11-01
					REVISION/ISSUE: 0
					REALIZADO/DRAWN: E.DE BLAS
					APROBADO/SIGNATURE:
		CMLCCP-2266			SIN ESCALA/DO NOT SCALE