



| No. | DATE     | MODIFICATION | REASON      | MOD. BY |
|-----|----------|--------------|-------------|---------|
| 0   | 01/03/16 | New design.  | New design. | X.E.    |

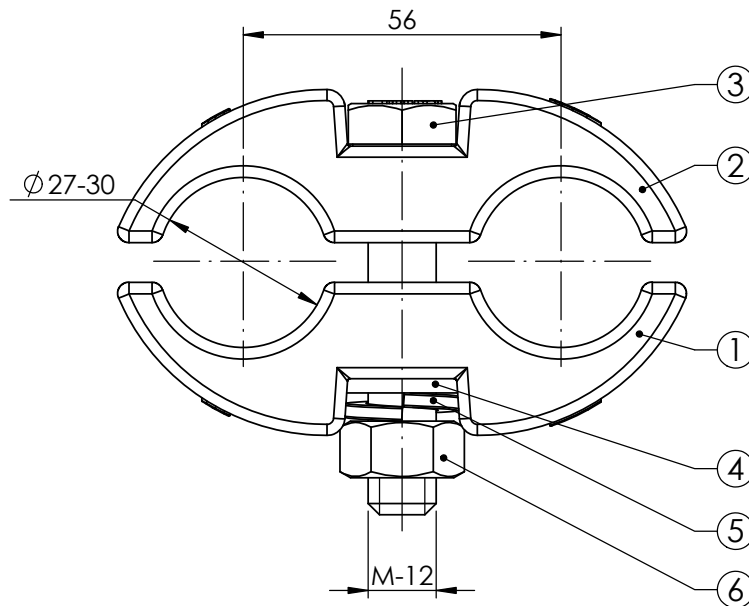

| 6   | 3    | NUT METRIC 12+0.4         | GALVANIZED STEEL | 0013  | DIN-934   | 0.02         |
|-----|------|---------------------------|------------------|-------|-----------|--------------|
| 5   | 3    | SPRING WASHER METRIC 12   | GALVANIZED STEEL | 0164  | DIN-127 B | 0.00         |
| 4   | 3    | FLAT WASHER METRIC 12     | GALVANIZED STEEL | 0047  | DIN-125   | 0.01         |
| 3   | 3    | BOLT M12x65 SHANK 31 8.8  | GALVANIZED STEEL | 0622  | DIN-931   | 0.00         |
| 2   | 1    | PARALLEL GROVE CLAMP BODY | ALUMINIUM ALLOY  | 11857 | EN-1706   | 0.42         |
| 1   | 1    | PARALLEL GROVE CLAMP BODY | ALUMINIUM ALLOY  | 11857 | EN-1706   | 0.41         |
| No. | QTY. | DESCRIPTION               | MATERIAL         | CODE  | STANDARD  | WEIGHT (Kg.) |

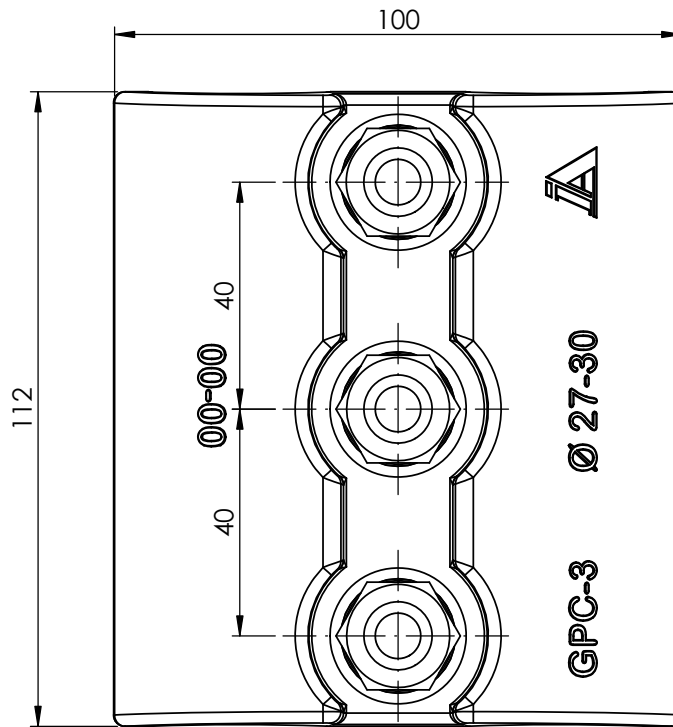


INDUSTRIAS  
ARRUTI S.A.

F40513

NAME

UNITS (mm.)



- Manufactured according to IEC 61284 standard  
- Tolerances unless otherwise stated to be:  
Up to and including 35 mm.  $\pm 0.7$  mm. Over 35 mm.  $\pm 2\%$   
- Hot dip galvanized according to ISO 1461 standard

- Range: Ø27-30  
- Tightening Torque: 30Nm.  
- lcc: Depend on the connexion to the piece  
- Coating thickness. Local: 40µm. Average: 50µm

TOTAL WEIGHT: 1.13 Kg.

|           |      |            |                                        |       |         |       |
|-----------|------|------------|----------------------------------------|-------|---------|-------|
| DRAWN BY  | X.E. | 01/03/2016 | PARALLEL GROVE CLAMP<br>GPC-3 (Ø27-30) | SCALE | DRAWING | ISSUE |
| SIGNED BY | I.L. | 01/03/2016 |                                        | 3:4   | 11858-M | 0     |

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.