


No.	DATE	MODIFICATION	REASON	MOD. BY
0	07/01/13	Edited in new format.	CAD software change.	E.V.
1	13/06/17	Breaking load is modified	-	J.E.
2	22/07/19	13822 & 13823 are added.	-	J.E.
3	18/05/20	14448 is added.	-	J.E.

MARKINGS:

LOT: Month & Year
REFERENCE: E-24xAxL



REFERENCE	CODE	"A" (mm.)	"L" (mm.)	"C" (mm.)	WEIGHT (kg.)
E-24x70x220	13823	70	220	160	2,29
E-24x72x180	8717	72	180	120	2,02
E-24x80x180	6164	80	180	120	2,03
E-24x80x220	8045	80	220	100	2,24
E-24x80x350	14448	80	350	300	3,23
E-24x90x130	8998	90	130	85	1,72
E-24x90x165	5528	90	165	100	1,94
E-24x90x185	6020	90	185	120	2,08
E-24x100x220	13822	100	220	160	2,34

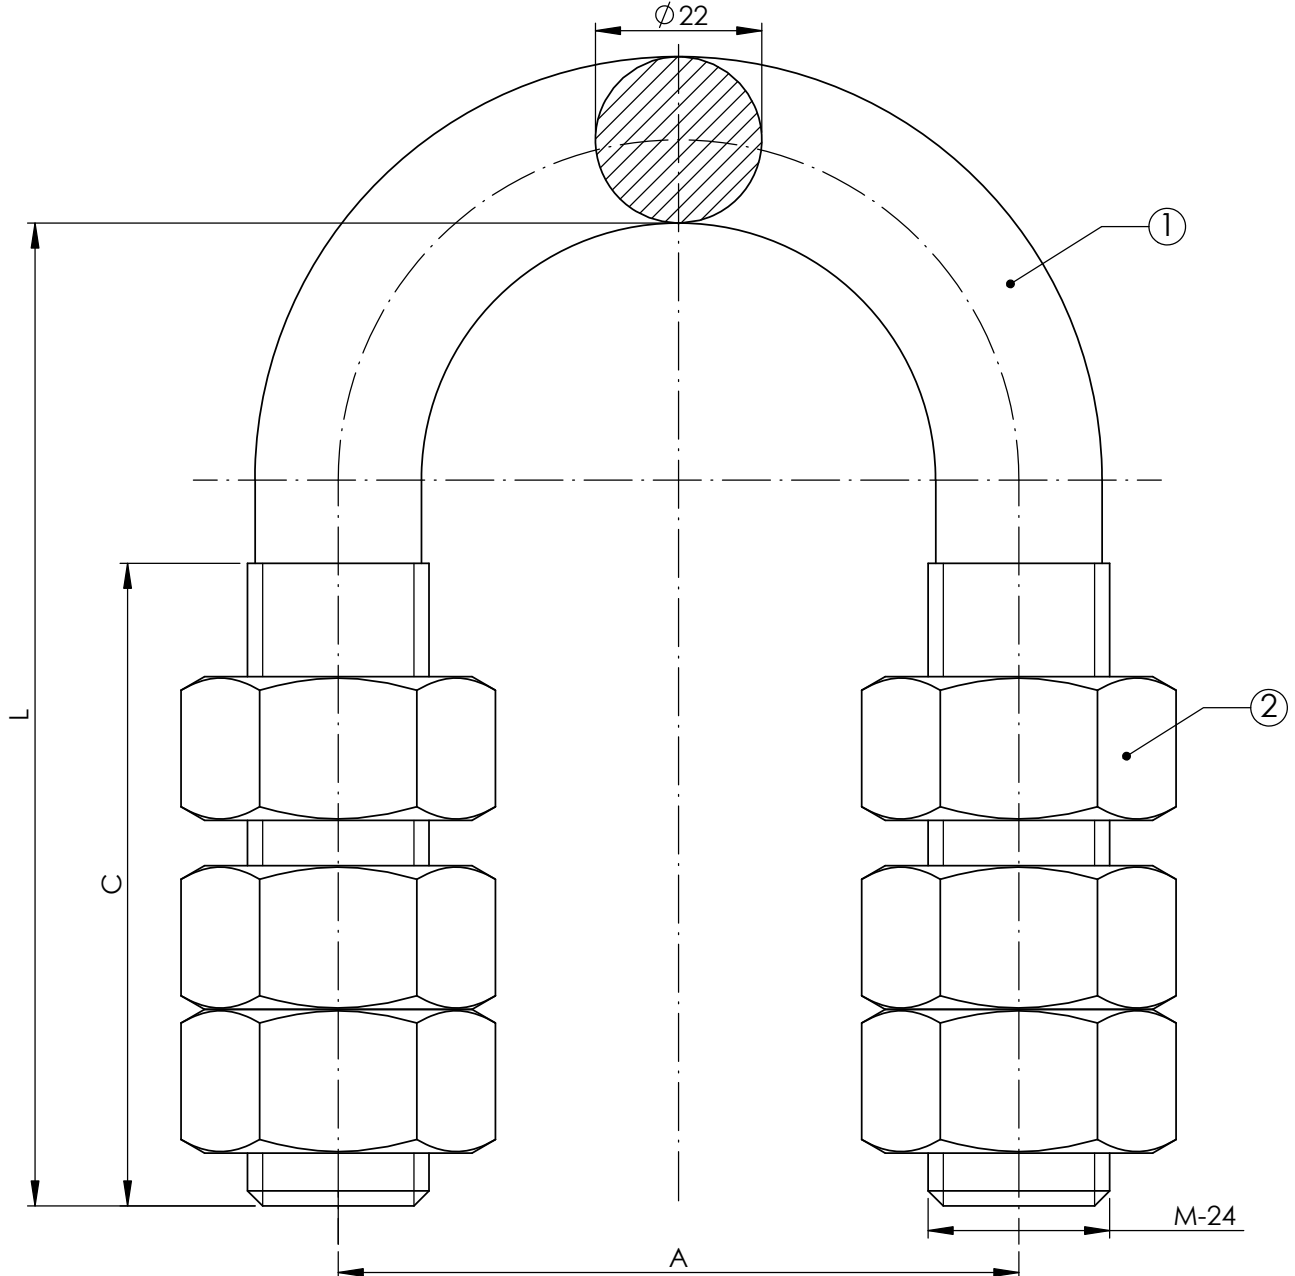

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.

 INDUSTRIAS ARRUTI S.A.	2	6	NUT METRIC 24		GALVANIZED STEEL	0052	DIN 934	0.11		
	1	1	U-BOLT BODY M-24		GALVANISED STEEL	-	ISO-898-1			
	No.	QTY.	DESCRIPTION		MATERIAL	CODE	STANDARD	WEIGHT (Kg.)		
	UNITS (mm.)		- Manufactured according to IEC 61284 standard - Tolerances unless otherwise stated to be: Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2% - Hot dip galvanized according to ISO 1461 standard			- M.B.S.L.: 26.000 daN - M.D.S.L.: 70% M.B.S.L. - lcc: Depend of the connexion to the piece - Coating thickness. Local: 40µm. Average: 50µm		TOTAL WEIGHT: Table		
F40513	NAME	 	U-BOLT M-24 E-24xAxL			SCALE			DRAWING	ISSUE
DRAWN BY	E.V.	07/01/2013				1:1		E-24-M	2	
SIGNED BY	I.L.	07/01/2013								