
No.	DATE	MODIFICATION	REASON	MOD. BY
0	09/12/10	Item is redesigned.	The item was too heavy.	J.A.G.
1	19/04/11	Added range and tightening torque.		J.A.G.
2	20/06/17	Opening measure updated.		I.F.
3	1/12/17	The plane is updated.	Marks on the back note and measure of ring added.	I.F.
4	25/09/24	Drawing updated.		LF.



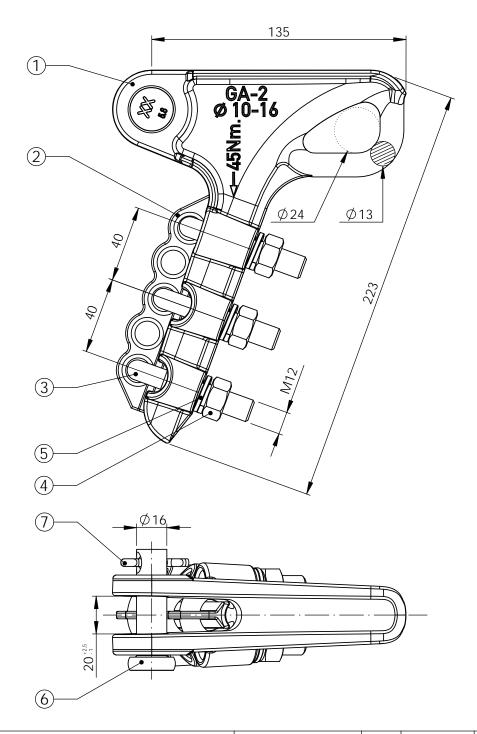

Г		Manufactured according to IEC 41394 standard Panga: Ø10 16mm				TOTAL MEICHT, 104 Kg		
	No.	QTY.		DESCRIPTION	MATERIAL	CODE	STANDARD	WEIGHT (Kg.)
	1	1	GA-2 CL	AMP BODY	ALUMINIUM	0172	-	0.44
	2	1	GA-2 CL	AMP KEEPER	ALUMINIUM	8613	-	0.05
	3	3	GA-2 AN	D GA-2-L CLAMP U-BOLT	GALVANIZED STEEL	0160	UNE-36.034	0.11
	4	6	NUT M-12	2	GALVANIZED STEEL	0181	DIN-934	0.02
	5	6	SPRING V	VASHER METRIC-12	GALVANISED STEEL	0164	DIN-127	0.00
	6	1	AXE Ø16	x57 5.8	GALVANIZED STEEL	2931	-	0.11
	7	1	STAINLES	S STEEL 4,5x37 SAFETY PIN	STAINLESS STEEL	0027	AISI 304	0.00

INDUSTRIAS ARRUTI S.A

This drawing is property of 1. Arruti and must not be copied, exhibited or furnished without the written consent of 1. Arruti

- Manufactured according to IEC 61284 standard - Tolerances unless otherwise stated to be: Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2% - Hot dip galvanized according to ISO 1461 standard UNITS (mm.)

Range: Ø10-16mm. Tightening torque: 45Nm - M.B.S.L.: 6.500 daN EYE M.B.S.L.: 2.000 daN

F40010	INAIVIE	_	Ψ	not dip gai
DRAWN BY	J.A.G.			09/12/2010
SIGNED BY	J.A.G.			09/12/2010

GA-2 STRAIN CLAMP GA-2

SCALE DRAWING ISSUE 0167-M 1:2 6