


No.	DATE	MODIFICATION	REASON	MOD. BY
1	29/05/23	Weights are added	---	E.V.

GUY GRIP DEAD-END

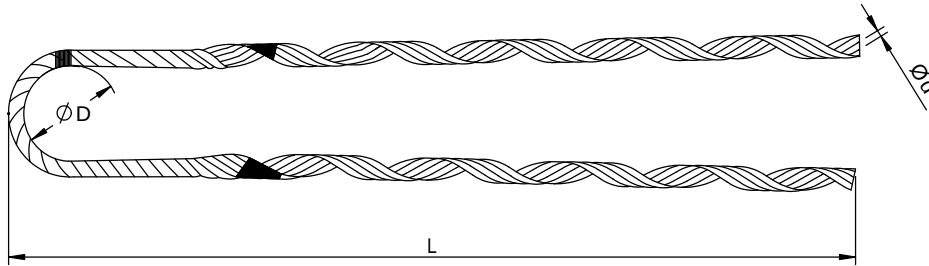

REFERENCE	Ø CONDUCTOR (mm)		Dimensiones (mm)			Rods Nº	Identification colour	Breaking Load (daN)	Weight (kg)
	Min.	Max.	Ø D (Bond)	Ø d (Wire)	Lenght "L"				
RAAC-039-043/D	3,95	4,25	40	1,78	450	4	ORANGE	1.500	0,075
RAAC-043-046/D	4,26	4,60	40	1,78	500	4	RED	1.650	0,085
RAAC-046-049/D	4,61	4,85	50	2,18	590	4	GREEN	2.100	0,145
RAAC-049-054/D	4,86	5,40	50	2,18	600	4	BLACK	2.200	0,150
RAAC-054-058/D	5,41	5,80	50	1,78	560	5	BLUE	2.700	0,115
RAAC-058-062/D	5,81	6,20	50	2,18	610	5	YELLOW	3.250	0,190
RAAC-062-065/D	6,21	6,50	50	2,18	680	5	WHITE	3.525	0,210
RAAC-065-070/D	6,51	7,00	50	2,18	680	5	BLUE	3.525	0,210
RAAC-070-073/D	7,01	7,30	50	2,54	680	5	ORANGE	4.750	0,285
RAAC-073-079/D	7,31	7,90	50	2,54	680	5	BLACK	4.750	0,285
RAAC-079-083/D	7,91	8,30	50	2,54	680	5	GREEN	4.700	0,280
RAAC-083-089/D	8,31	8,95	60	2,54	720	5	RED	5.100	0,305
RAAC-089-093/D	8,96	9,30	60	2,54	780	6	ORANGE	7.100	0,395
RAAC-093-097/D	9,31	9,70	60	2,54	810	6	WHITE	7.150	0,410
RAAC-097-101/D	9,71	10,07	60	3,02	840	5	YELLOW	7.500	0,500
RAAC-101-105/D	10,08	10,45	60	3,02	860	5	RED	7.650	0,510
RAAC-105-108/D	10,46	10,80	60	3,02	870	6	GREEN	9.000	0,620
RAAC-108-112/D	10,81	11,20	60	3,02	895	6	BLUE	9.100	0,640
RAAC-112-117/D	11,21	11,70	60	3,02	910	6	BLACK	9.350	0,650
RAAC-117-121/D	11,71	12,10	60	3,51	940	5	RED	10.500	0,755
RAAC-121-125/D	12,11	12,50	60	3,51	970	6	WHITE	12.000	0,935
RAAC-125-131/D	12,51	13,10	60	3,51	1000	6	YELLOW	12.600	0,965
RAAC-131-139/D	13,11	13,90	60	3,51	1080	6	BLUE	13.200	1,040
RAAC-139-146/D	13,91	14,60	60	4,04	1200	6	BLACK	16.500	1,535
RAAC-146-152/D	14,61	15,20	60	4,04	1330	6	RED	16.900	1,700
RAAC-152-157/D	15,21	15,70	60	4,04	1350	6	WHITE	17.000	1,725
RAAC-157-164/D	15,71	16,40	60	4,37	1350	6	GREEN	17.500	2,020

Application: Galvanised steel earthwires

Material: Galvanized steel ST1A according to UNE EN-50189


NOTE: Conductor wiring direction: Right

Preformed dead-end for other conductor diameters upon request.



INDUSTRIAS
ARRUTI S.A.

UNITS (mm.)



- Manufactured according to IEC 61284 standard
- Tolerances unless otherwise stated to be:
Length: +20/-10mm
Rod diameter: ±1%

- M.B.S.L.:
- M.D.S.L.: 70% M.B.S.L.
- lcc:

TOTAL WEIGHT: -

DRAWN BY	E.V.	11/03/2022	GUY GRIP DEAD-END FOR GALVANIZED STEEL EARTHWIRES RAAC	SCALE	DRAWING	ISSUE
SIGNED BY	I.L.	11/03/2022		N/S	RAAC-M	1

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.