

No.	0	04-09-17	Edited in new format.	CAD software change.	I.F.
DATE					MOD. BY
MODIFICATION					
REASON					




MARKINGS:

LOT (month & year)
FORGER MARK




& REFERENCE

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.

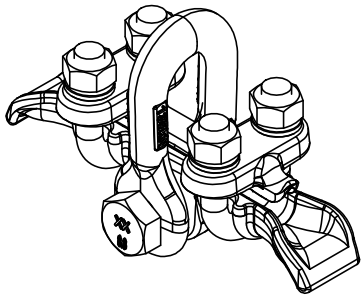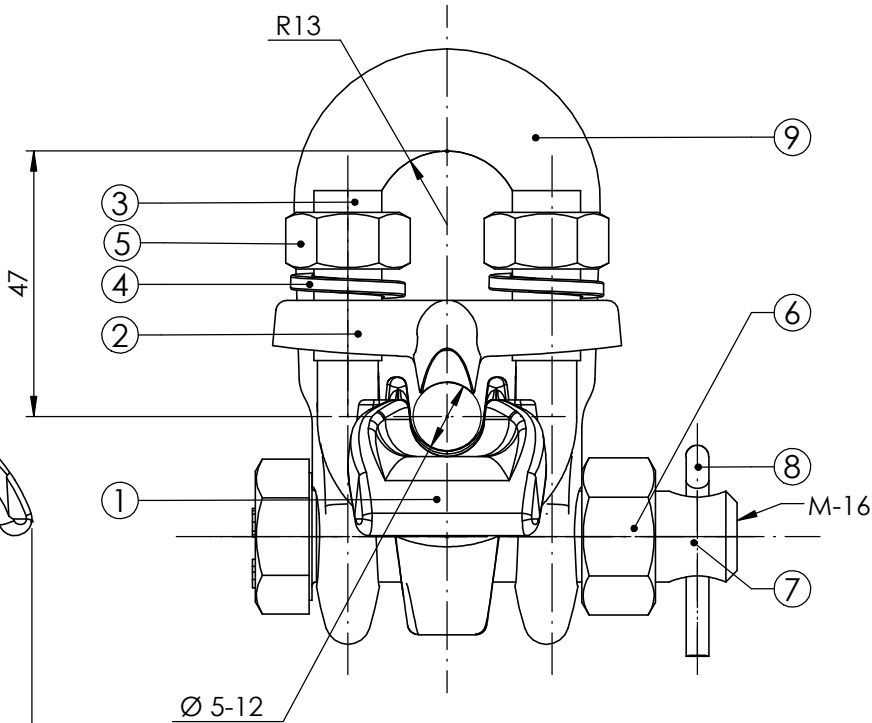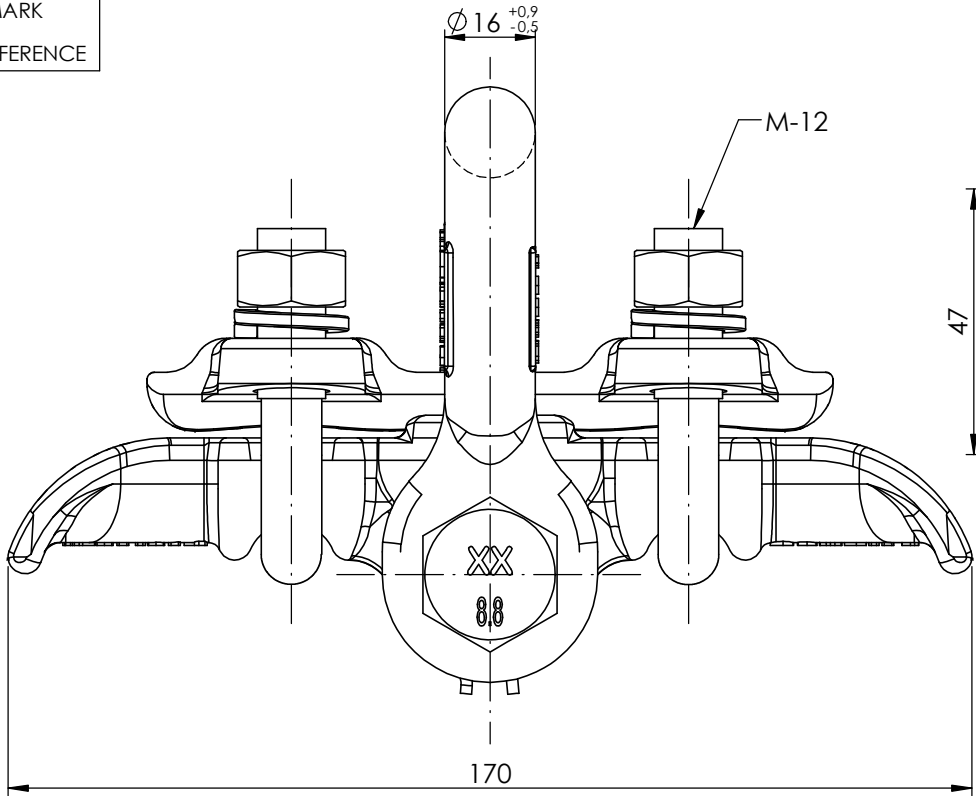

INDUSTRIAS ARRUTI S.A.	NAME
DRAWN BY	I.F.
SIGNED BY	I.L.

9	1	SM STRAIGHT SHACKLE	GALVANIZED STEEL	0021s	-	0.34	
8	1	STAINLESS STEEL 4.5x37 SAFETY PIN	STAINLESS STEEL	0027	-	0.00	
7	1	BOLT M16x75 SHANK 47 8.8	GALVANIZED STEEL	0023	DIN-931	0.15	
6	1	NUT METRIC 16	GALVANIZED STEEL	0025	DIN-934	0.03	
5	4	NUT M-12	GALVANIZED STEEL	0181	DIN-934	0.02	
4	4	SPRING WASHER M-12	GALVANISED STEEL	0164	DIN-127 B	0.00	
3	2	GS-2 CLAMP U-BOLT	GALVANIZED STEEL	0161	UNE-36.034	0.10	
2	1	SUSPENSION CLAMP KEEPER	GALVANIZED STEEL	1719	EN-1.706	0.24	
1	1	SUSPENSION CLAMP BODY	GALVANIZED STEEL	1283	EN-1.706	0.44	
No.	QTY.	DESCRIPTION	MATERIAL	CODE	STANDARD	WEIGHT (Kg.)	
UNITS (mm.)		- Manufactured according to IEC 61284 standard	- M.B.S.L.: 8,000 daN		TOTAL WEIGHT: 1.50 Kg.		
		- Tolerances unless otherwise stated to be:	- Range: Ø5-12				
		Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2%	- Torque: 50Nm				
		- Hot dip galvanized according to ISO 1461 standard	- Coating thickness. Local: 70µm. Average: 85µm				
	04/09/2017	SUSPENSION CLAMP GSAC-12			SCALE	DRAWING	ISSUE
	04/09/2017				3:4	1282-M	3