



No.	DATE	MODIFICATION	REASON	MOD. BY
0	28/11/14	Edited in new format.	CAD software change.	E.V.
1	30-04-15	Material of the bolt is changed	Client requirement	I.L.

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.

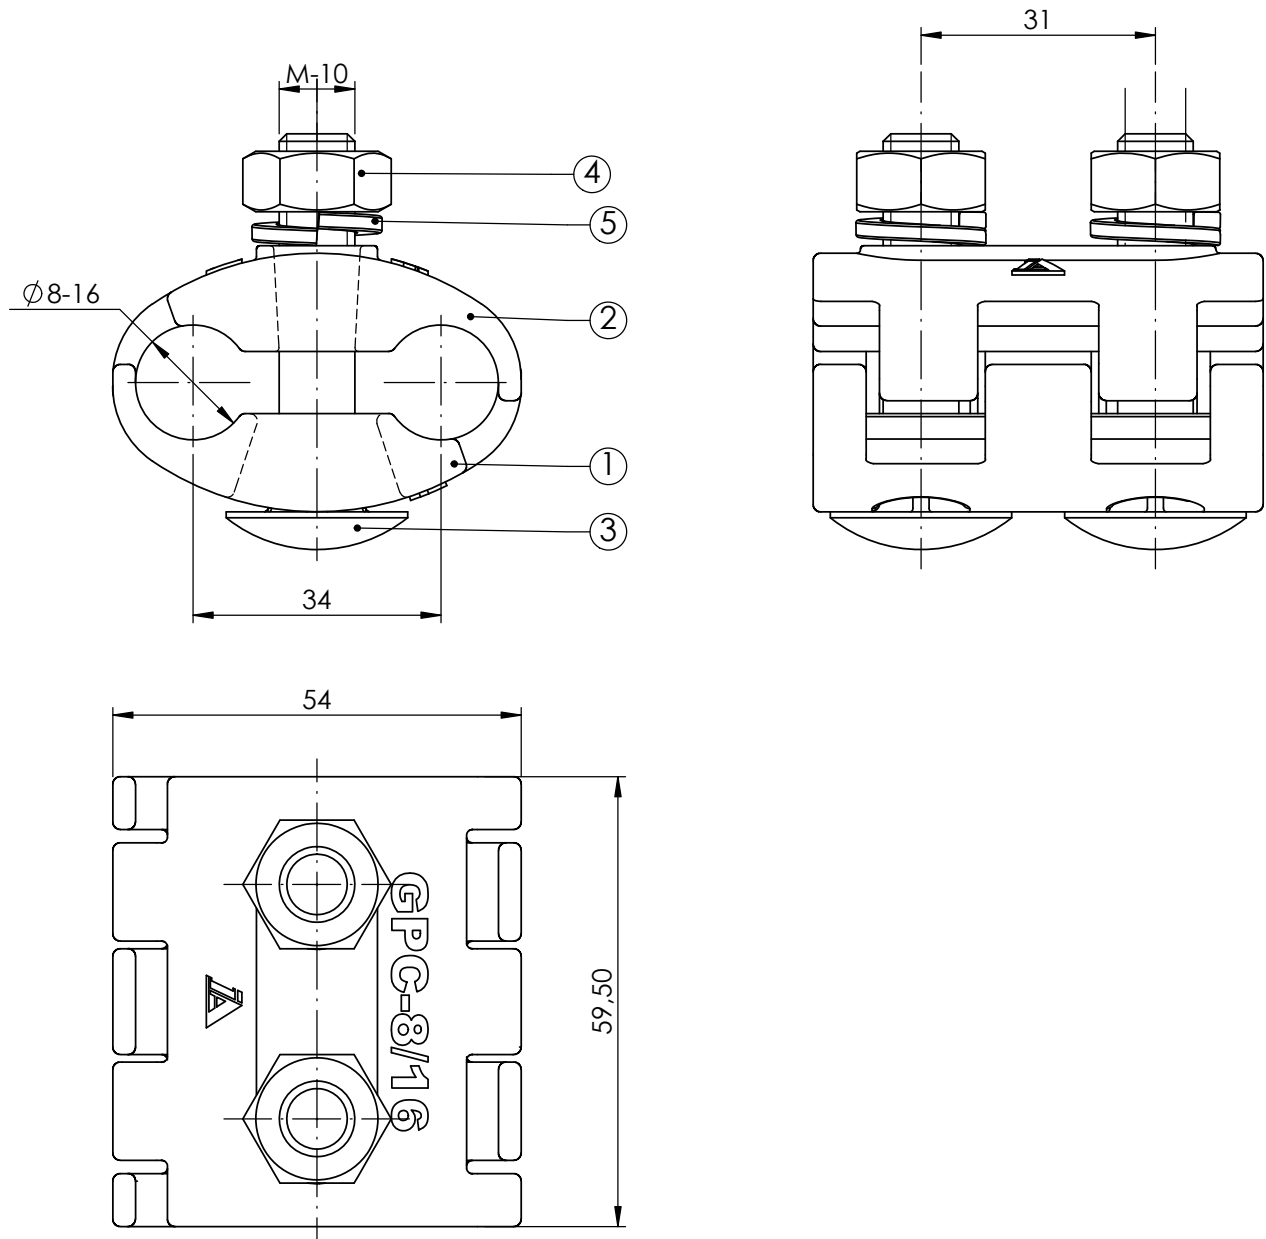

5	2	SPRING WASHER METRIC 10	GALVANIZED STEEL	0182	DIN-125 A	0.00
4	2	NUT METRIC 10	GALVANIZED STEEL	0183	DIN-934	0.01
3	2	CARRIAGE BOLT M10x50 8.8	GALVANIZED STEEL	0827	DIN-603	0.04
2	1	TAP OFF CONNECTOR BODY	ALUMINIUM ALLOY	1681	EN-1706	0.06
1	1	TAP OFF CONNECTOR BODY	ALUMINIUM ALLOY	1681	EN-1706	0.06
No.	QTY.	DESCRIPTION	MATERIAL	CODE	STANDARD	WEIGHT (Kg.)
UNITS (mm.)		- Manufactured according to IEC 61284 standard - Tolerances unless otherwise stated to be: Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2% - Hot dip galvanized according to ISO 1461 standard		- Range: Ø8-16 mm. - Tightening Torque: 25 Nm. - lcc: 31,5kA/0,5s - Coating thickness. Local: 45µm. Average: 55µm		TOTAL WEIGHT: 0.23 Kg.
						
		28/11/2014	TAP OFF CONNECTOR GPC-8/16	SCALE	DRAWING	ISSUE
				1:1	1593-M	3



INDUSTRIAS
ARRUTI S.A.