
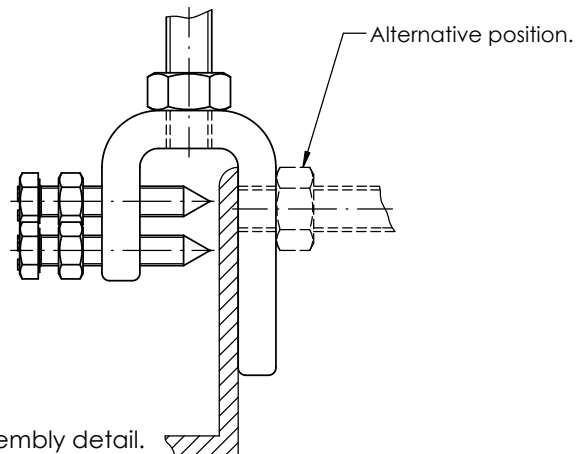
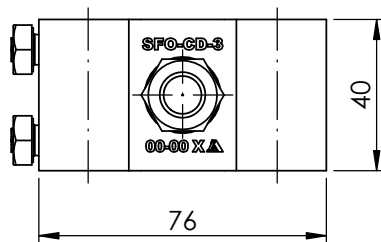
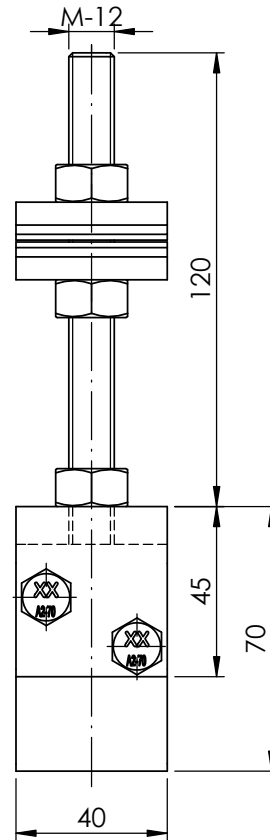


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.

No.	DATE	MODIFICATION	REASON	MOD. BY
0	16/12/14	Edited in new format.	CAD software change.	E.V.
1	04/09/15	Range is changed,before Ø8-24 mm.	Acceptable range.	E.V.

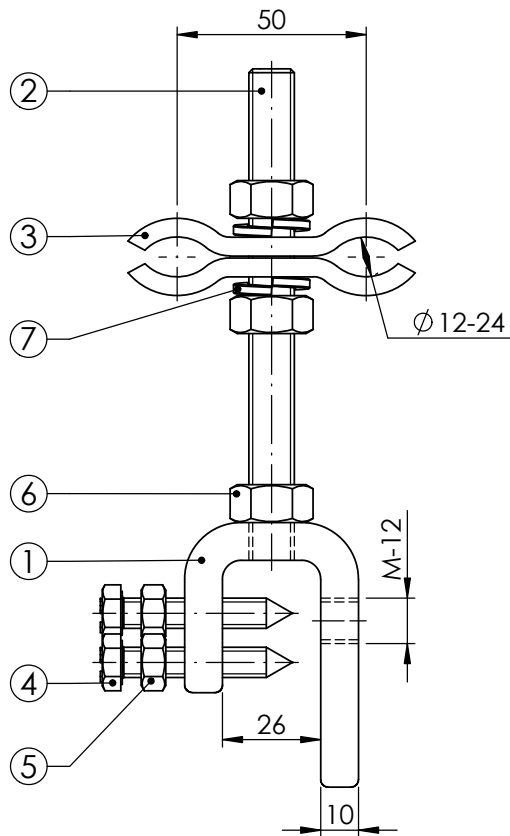

Assembly detail.

7	2	SPRING WASHER METRIC 12		GALVANIZED STEEL	0164	DIN-127 B	0.00	
6	3	NUT METRIC 12+0.4		GALVANIZED STEEL	0013	DIN-934	0.02	
5	2	NUT METRIC 8 A2-70		STAINLESS STEEL	0810	DIN-934	0.01	
4	2	TIP BOLT M8x45 IX A2-70		STAINLESS STEEL	2011	DIN-933	0.02	
3	2	HALF CONNECTION CLAMP (GABLE)		ALUMINUM	0836	UNE-38114	0.04	
2	1	THREADED ROD M12x130 DIN 975		GALVANIZED STEEL	0811	EN-10025	0.11	
1	1	PLATE FOR FIBRE OPTIC DOWNLEAD		GALVANIZED STEEL	2010S	EN-10083	0.39	
No. QTY.		DESCRIPTION		MATERIAL	CODE	STANDARD	WEIGHT (Kg.)	
UNITS (mm.)		- Manufactured according to IEC 61284 standard - Tolerances unless otherwise stated to be: Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2% - Hot dip galvanized according to ISO 1461 standard			- Range: Ø12-24 mm. - Tightening Torque M-8: 20 Nm. - Tightening Torque M-12: 30 Nm. - Coating thickness. Local: 70µm. Average: 85µm		TOTAL WEIGHT: 0.69 Kg.	
		16/12/2014	DOWNLEAD CLAMPS FOR FIBRE OPTIC CABLES			SCALE	DRAWING	ISSUE
		16/12/2014	SFO-CD-3			1:2	2023-M	4



F40513

NAME