

No.	DATE	MODIFICATION	REASON	MOD. BY
0	15/06/12	Edited in new format.	CAD software change.	E.V.
1	14/05/13	Breaking load is modified to 21.000 daN.	Breaking load is modified to 21.000 daN.	E.V.


MARKINGS:

LOT (month & year)

FORGER MARK



& REFERENCE

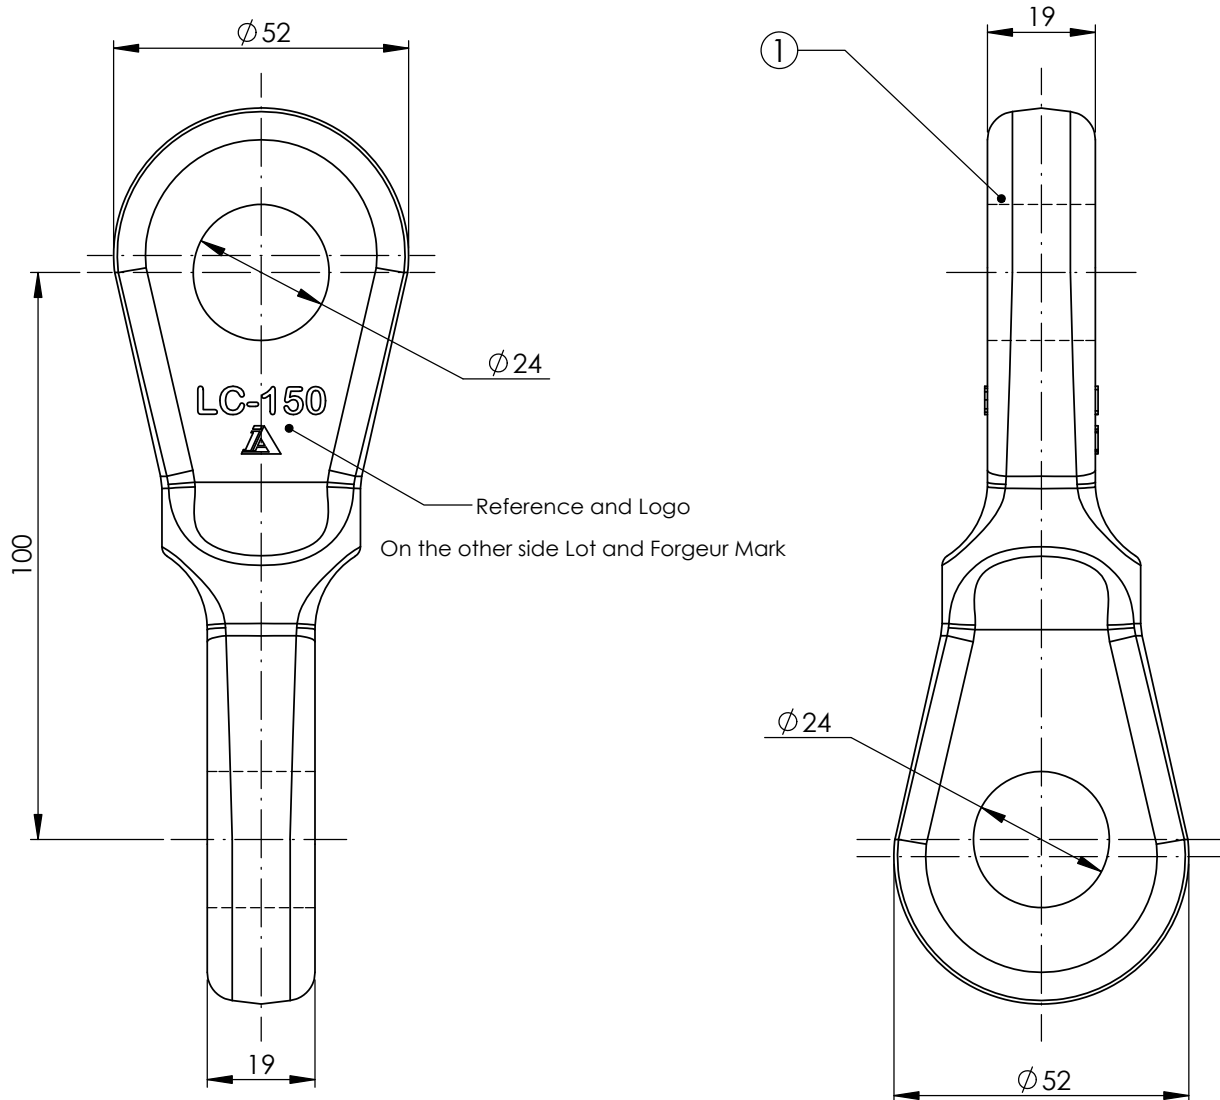

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.



INDUSTRIAS
ARRUTI S.A.

F40513

NAME

DRAWN BY	E.V.	15/06/2012	TWISTED EYE LINK LC-150/Ø24	SCALE	DRAWING	ISSUE
SIGNED BY	I.L.	15/06/2012		3:4	4820-M	1

1	1	TWISTED EYE LINK		GALVANIZED STEEL		4820	EN-10.083-2	0.81
No.	QTY.	DESCRIPTION		MATERIAL		CODE	STANDARD	WEIGHT (Kg.)
UNITS (mm.)		- Manufactured according to IEC 61284 standard - Tolerances unless otherwise stated to be: Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2% - Hot dip galvanized according to ISO 1461 standard			- M.B.S.L.: 21.000 daN - M.D.S.L.: 75% M.B.S.L. - lcc: Depend of the connexion to the piece - Coating thickness. Local: 70µm. Average: 85µm			TOTAL WEIGHT: 0.81 Kg.
								