
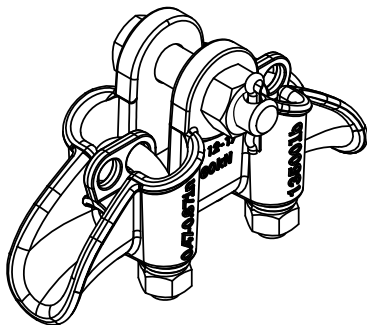
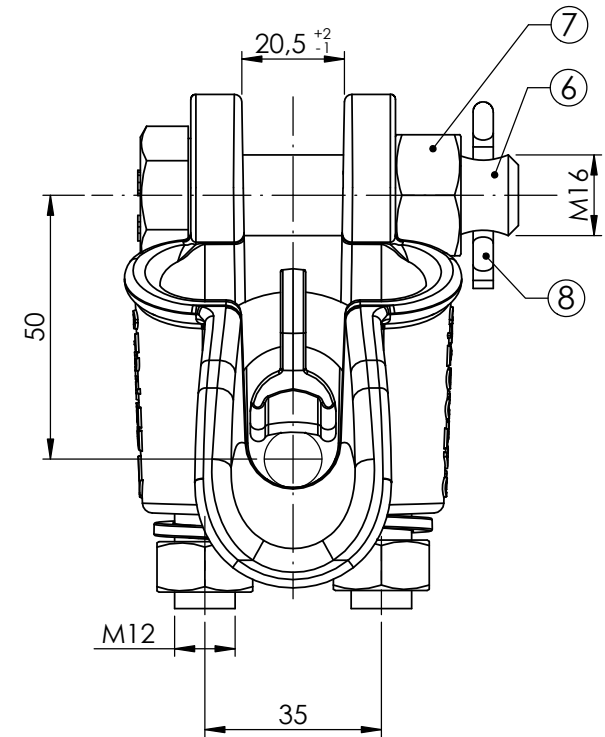
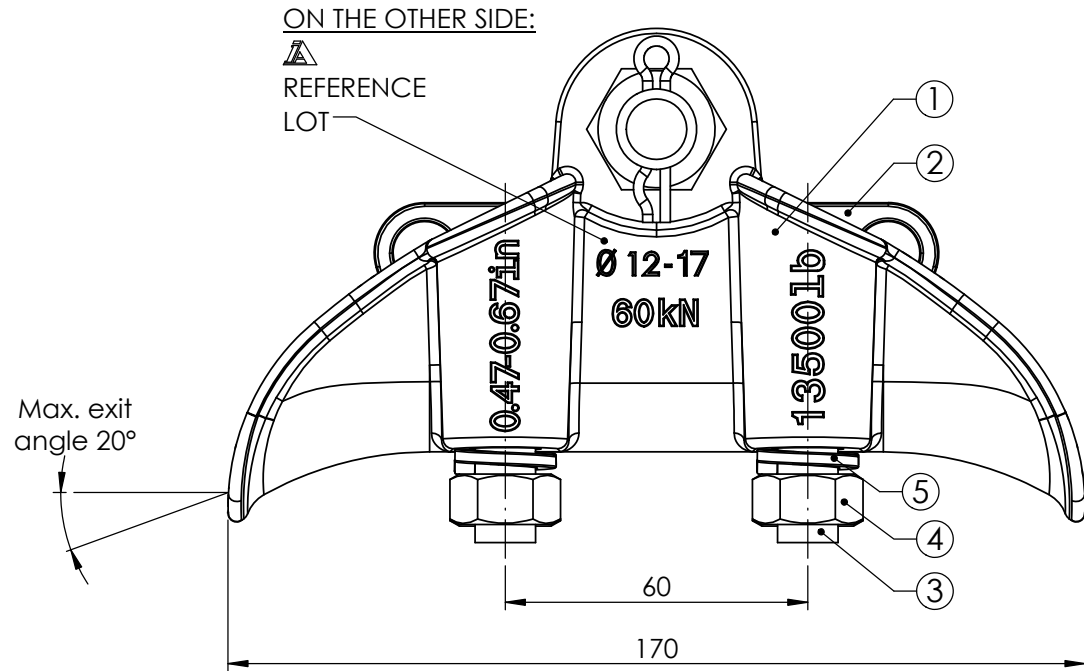


No.	0	25/01/19	Design updated.		
DATE					
MODIFICATION					
REASON					
MOD. BY					

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.



F40513	NAME
DRAWN BY	I.F.
SIGNED BY	I.L.

8	1	STAINLESS STEEL 4,5x37 SAFETY PIN	STAINLESS STEEL	0027	-	0.00	
7	1	NUT METRIC 16+0.6	GALVANIZED STEEL	0025	DIN-934	0.03	
6	1	BOLT M16X65 SHANK 42 8.8	GALVANIZED STEEL	2592	DIN-931	0.13	
5	4	SPRING WASHER METRIC 12	GALVANIZED STEEL	0164	DIN-127 B	0.00	
4	4	NUT METRIC 12+0.2	GALVANIZED STEEL	0181	DIN-934	0.02	
3	2	GS-2 CLAMP U-BOLT	GALVANIZED STEEL	0161	UNE-36.034	0.10	
2	1	SUSPENSION CLAMP KEEPER	ALUMINIUM ALLOY	0154	EN-1.706	0.06	
1	1	SUSPENSION CLAMP BODY	ALUMINIUM ALLOY	0149	EN-1.706	0.36	
No. QTY.		DESCRIPTION	MATERIAL	CODE	STANDARD	WEIGHT (Kg.)	
UNITS (mm.)		- Manufactured according to IEC 61284 standard - Tolerances unless otherwise stated to be: Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2% - Hot dip galvanized according to ISO 1461 standard		- M.B.S.L.: 6.000 daN - Range: Ø12-17 mm - Torque: 30 Nm - Coating thickness. Local: 40µm. Average: 50µm		TOTAL WEIGHT: 0.88 Kg.	
							
		25/01/2019	SUSPENSION CLAMP GS-2T		SCALE	DRAWING	ISSUE
		25/01/2019			2:3	1035-M	4