
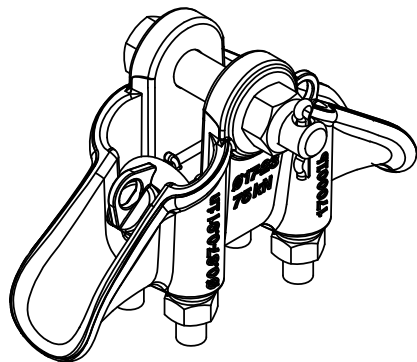
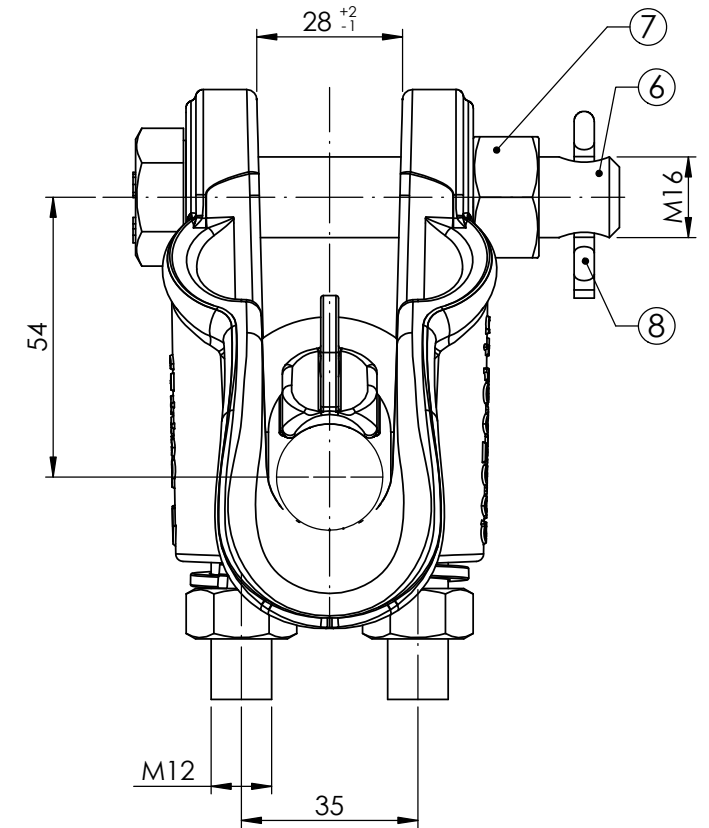
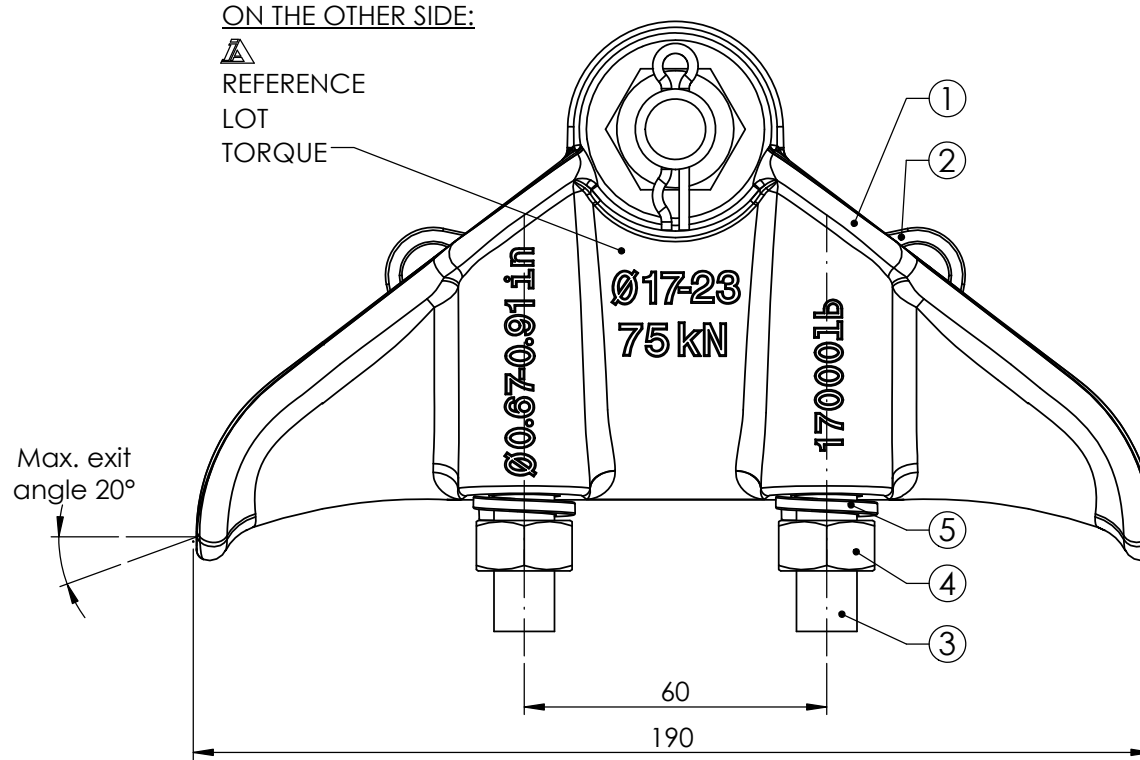


This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.



F40513 NAME
DRAWN BY M.V.
SIGNED BY I.L.

8	1	STAINLESS STEEL 4,5x37 SAFETY PIN	STAINLESS STEEL	0027	-	0.00
7	1	NUT METRIC 16+0.6	GALVANIZED STEEL	0025	DIN-934	0.03
6	1	BOLT M16x86 SHANK 52 8.8	GALVANIZED STEEL	0838	DIN-931	0.17
5	4	SPRING WASHER METRIC 12	GALVANIZED STEEL	0164	DIN-127 B	0.00
4	4	NUT METRIC 12+0.2	GALVANIZED STEEL	0181	DIN-934	0.02
3	2	GA-3 AND GS-3 CLAMP U-BOLT	GALVANIZED STEEL	1920	UNE-36.034	0.13
2	1	SUSPENSION CLAMP KEEPER	ALUMINIUM ALLOY	0155	EN-1.706	0.073
1	1	SUSPENSION CLAMP BODY	ALUMINIUM ALLOY	0150	EN-1.706	0.50
No.	QTY.	DESCRIPTION	MATERIAL	CODE	STANDARD	WEIGHT (Kg.)
UNITS (mm.)		- Manufactured according to IEC 61284 standard - Tolerances unless otherwise stated to be: Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2% - Hot dip galvanized according to ISO 1461 standard	- M.B.S.L.: 7.500 daN - Range: Ø17-23 mm - Torque: 40 Nm - Coating thickness. Local: 40µm. Average: 50µm		TOTAL WEIGHT: 1.11 Kg.	
						

SUSPENSION CLAMP
GS-3T

SCALE 2:3
DRAWING 1051-M
ISSUE 3

3	19/09/18	Marks are updated.	I.F.
2	27/11/17	Max. exit angle added.	I.F.
1	16/6/17	Opening measure updated.	I.F.
0	23/11/16	Edited in new format.	M.V.
No.	DATE	MODIFICATION	REASON
			MOD. BY