

No.	DATE	MODIFICATION	REASON	MOD. BY
0	20/12/11	Edited in new format.	CAD software change.	E.V.
1	11/03/21	Updated standard.	---	A.U.


MARKINGS:

LOT (month & year)

FORGER MARK




& REFERENCE

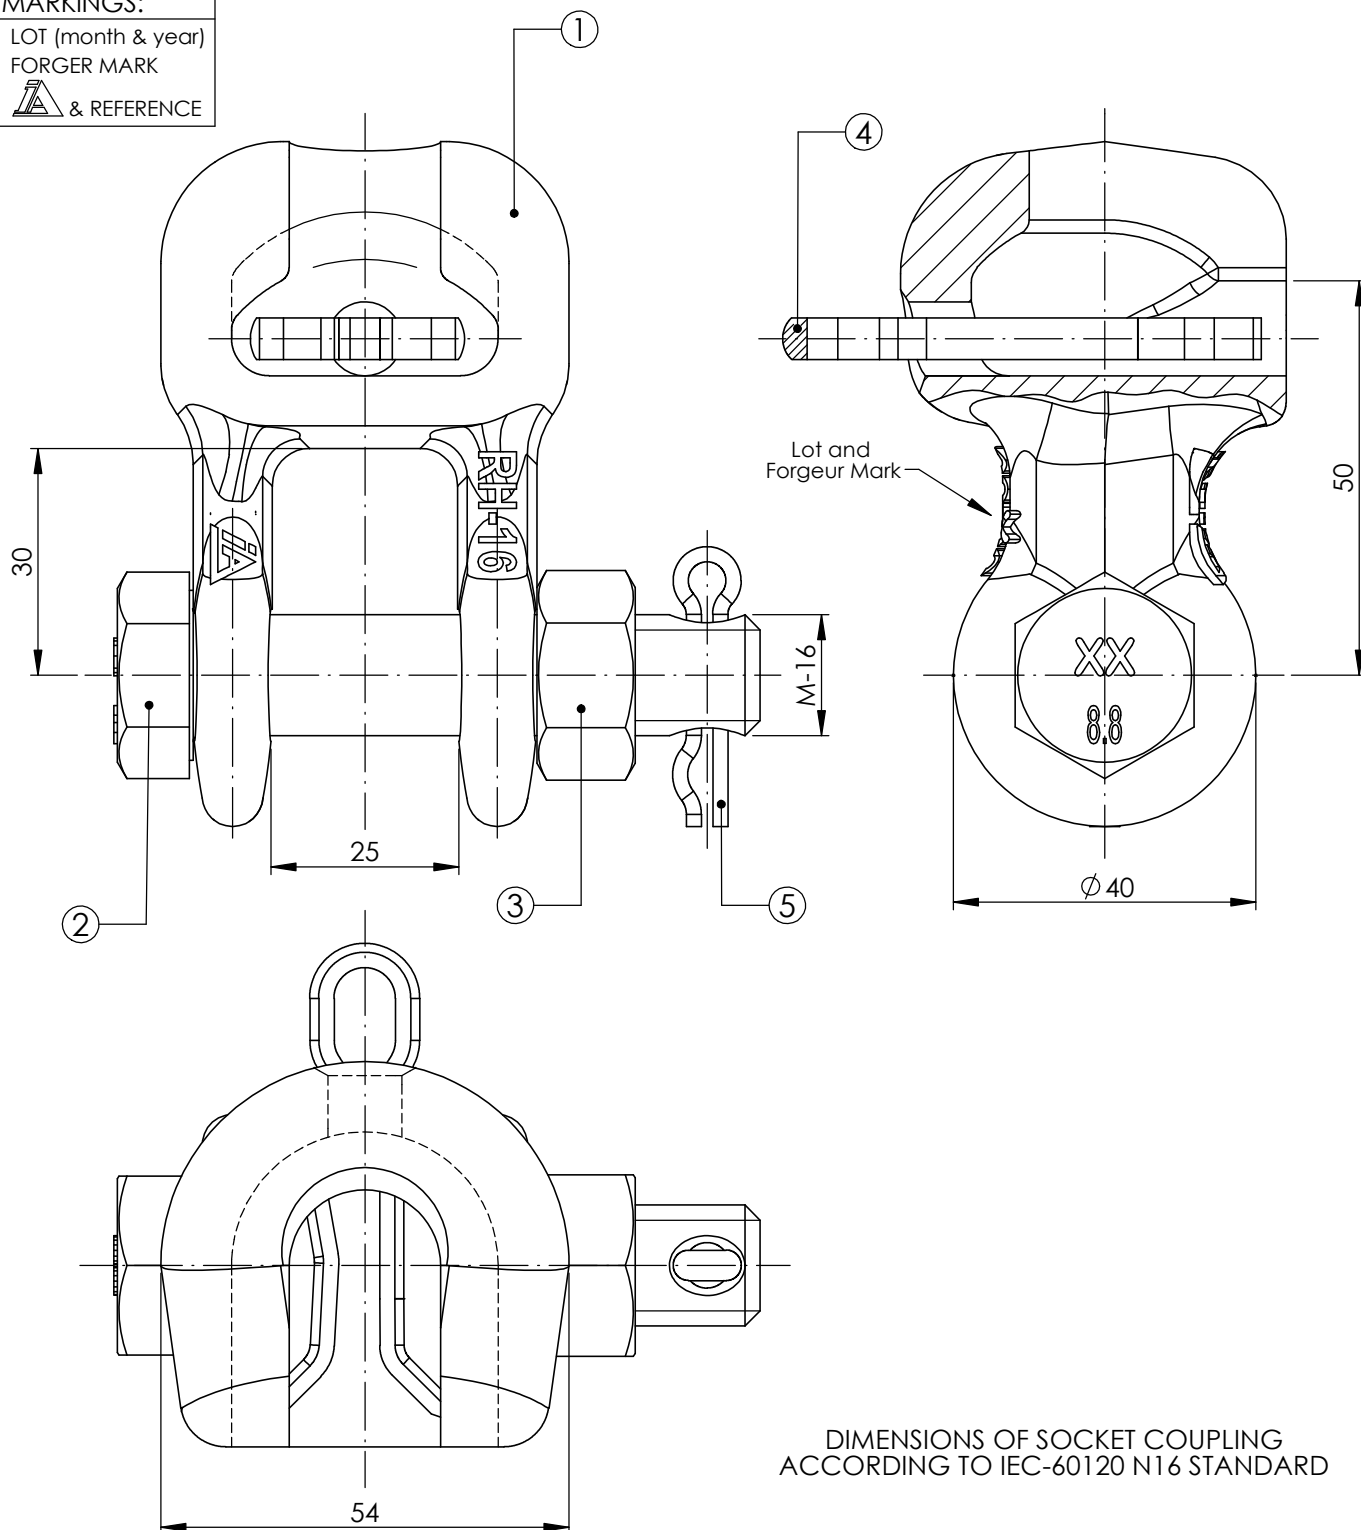

DIMENSIONS OF SOCKET COUPLING
ACCORDING TO IEC-60120 N16 STANDARD

5	1	SAFETY PIN	STAINLESS STEEL	0027	-	0.00
4	1	STANDARD SAFETY PIN FOR N-16 BALL SOCKET	STAINLESS STEEL	3196	IEC 372	0.02
3	1	NUT METRIC 16+0.6	GALVANIZED STEEL	0025	DIN 934	0.03
2	1	BOLT M16x75 SHANK 47 8.8	GALVANIZED STEEL	0023	DIN-931	0.15
1	1	SM CLEVIS SOCKET	GALVANIZED STEEL	0058s	EN-10.083-2	0.56
No.	QTY.	DESCRIPTION	MATERIAL	CODE	STANDARD	WEIGHT (Kg.)

UNITS (mm.)



- Manufactured according to IEC 61284 standard
- Tolerances unless otherwise stated to be:
Up to and including 35 mm. ± 0.7 mm. Over 35 mm. $\pm 2\%$
- Hot dip galvanized according to ISO 1461 standard

- M.B.S.L.: 12.500 daN
- M.D.S.L.: 75% M.B.S.L.

- lcc: Depend of the connexion to the piece
- Coating thickness. Local: 70 μ m. Average: 85 μ m

TOTAL WEIGHT: 0.76 Kg.



INDUSTRIAS
ARRUTI S.A.

F40513

NAME

DRAWN BY E.V.

20/12/2011

SIGNED BY I.L.

20/12/2011

CLEVIS SOCKET
RH-16

SCALE

1:1

DRAWING

0057-M

ISSUE

4

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.