



No.	DATE	MODIFICATION	REASON	MOD. BY
0	01/12/14	Edited in new format.	CAD software change.	E.V.
1	23/05/18	Bolt is updated.	Bolt without hole.	J.E.

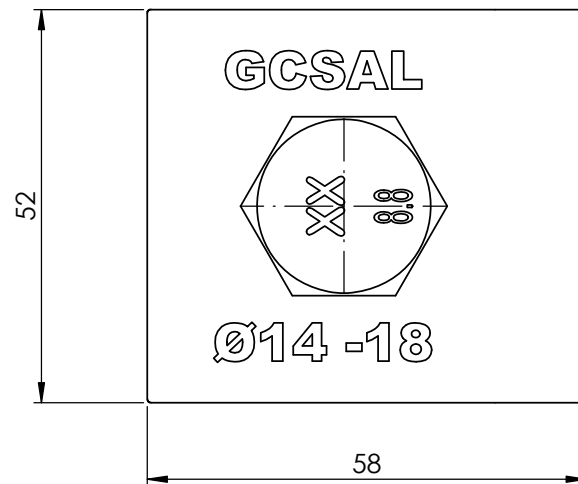

6	1	SPRING WASHER METRIC 16	GALVANIZED STEEL	0184	DIN-127 B	0.01
5	1	FLAT WASHER METRIC 16	GALVANIZED STEEL	0048	DIN-125	0.01
4	1	NUT METRIC 16+0.6	GALVANIZED STEEL	0025	DIN-934	0.03
3	1	BOLT M16x75 SHANK 47 8.8	STEEL GALVANIZED	13014	DIN-931	0.15
2	1	EARTHING CONNECTOR BODY	ALUMINIUM ALLOY	4875	EN-1706	0.09
1	1	EARTHING CONNECTOR BODY	ALUMINIUM ALLOY	4875	EN-1706	0.09
No.	QTY.	DESCRIPTION	MATERIAL	CODE	STANDARD	WEIGHT (Kg.)

UNITS (mm.)		- Manufactured according to IEC 61284 standard	- Range: Ø8-14 mm.	TOTAL WEIGHT: 0.38 Kg.		
		- Tolerances unless otherwise stated to be: Up to and including 35 mm. ±0.7 mm. Over 35 mm. ±2%	- Tightening Torque: 60 Nm.			
		- Hot dip galvanized according to ISO 1461 standard	- lcc: Depend on the connexion to the piece			
			- Coating thickness. Local: 40µm. Average: 50µm			

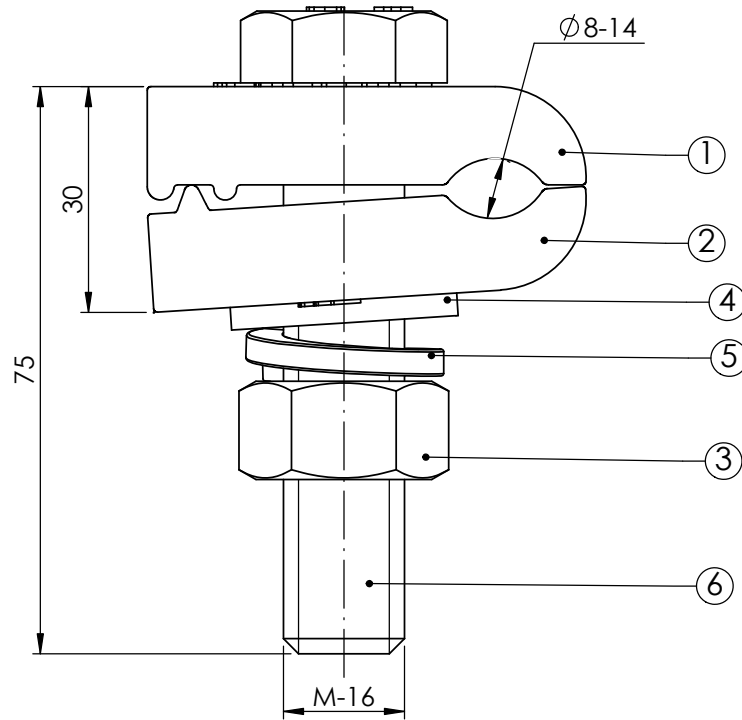

INDUSTRIAS
ARRUTI S.A.

F40513

NAME

DRAWN BY	E.V.	01/12/2014	EARTHING CONNECTOR GCSAL-8/14/M16	SCALE	DRAWING	ISSUE
SIGNED BY	I.L.	01/12/2014		1:1	4876-M	1

This drawing is property of I. Arruti and must not be copied, exhibited or furnished without the written consent of I. Arruti.